



WEVER & DUCRÉ
LIGHTING

RAY mini 1.0

258220W0

GENERAL

Ceiling

Surface

Signal White

IP20

Interior

RAL 9003^a

LED

Lamp PAR16

PAR16

Socket GU10

max. 12 W

OPTICAL

Flood

PHYSICAL

Diameter 70 mm

Height 82 mm

0.14 kg

ELECTRICAL

100 - 240 V

PC1

Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.


Project

Type


Notes

Quantity

Date

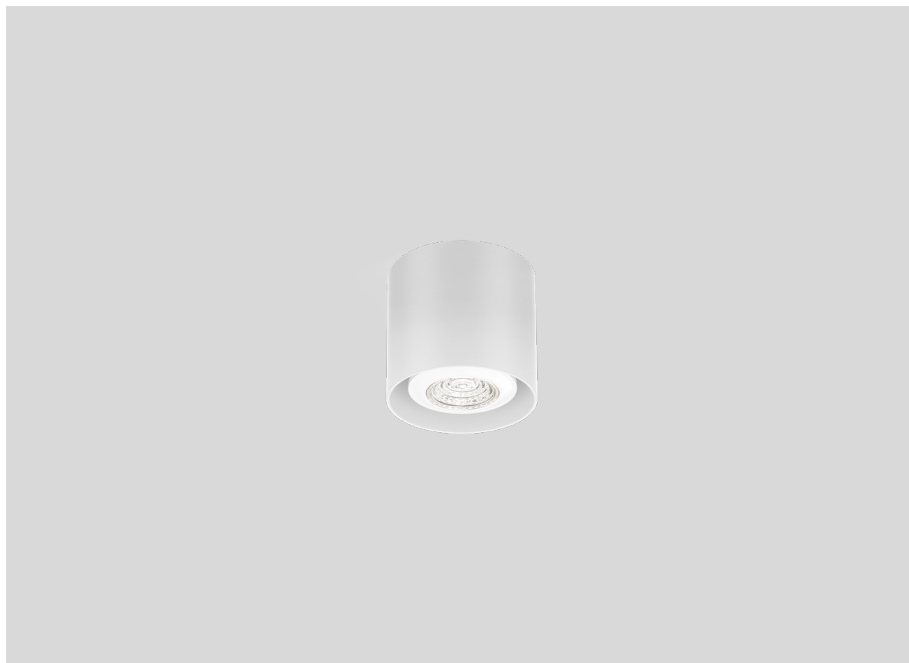

Cylindrical ceiling surface mounted downlight made from die-cast aluminium; surface Signal White; powder coated; matt texture; RAL 9003; optional inner reflector available; lamp socket GU10; lamp type PAR16; max. 12W; 100 - 240 V; degree of protection IP20; PC1; lamp not included;





WEVER & DUCRÉ
LIGHTING

RAY

mini 1.0

258220W0

OPTICAL

Inner Reflector

TYPE	COLOUR	ORDERCODE
RAY mini max. 10W	Black	9 0 0 1 9 9 B 4
RAY mini max. 10W	Gold	9 0 0 1 9 9 G 4
RAY mini max. 10W	Bronze	9 0 0 1 9 9 Q 4
RAY mini max. 10W	White	9 0 0 1 9 9 W 4

LED LAMPS

PAR16 LED Lamp

TYPE	COLOUR	Ø · H (MM)	ORDERCODE
2700K >90 CRI GU10	Black	Ø 50 · 58	9 0 1 2 2 8 B 3
3000K >90 CRI GU10	Black	Ø 50 · 58	9 0 1 2 2 8 B 5
2700K >80 CRI GU10	White	Ø 50 · 58	9 0 1 2 2 8 W 2
2700K >90 CRI GU10	White	Ø 50 · 58	9 0 1 2 2 8 W 3
3000K >80 CRI GU10	White	Ø 50 · 58	9 0 1 2 2 8 W 4
2700K >80 CRI GU10	Silver	Ø 51 · 55	9 0 5 2 2 7 S 2
3000K >80 CRI GU10	Silver	Ø 51 · 55	9 0 5 2 2 7 S 4